


INDUSTRIAL THERMOCOUPLES

Base Metal Angle Type Thermocouple With Ceramic Protection Tube Assembly

Model: **M12**

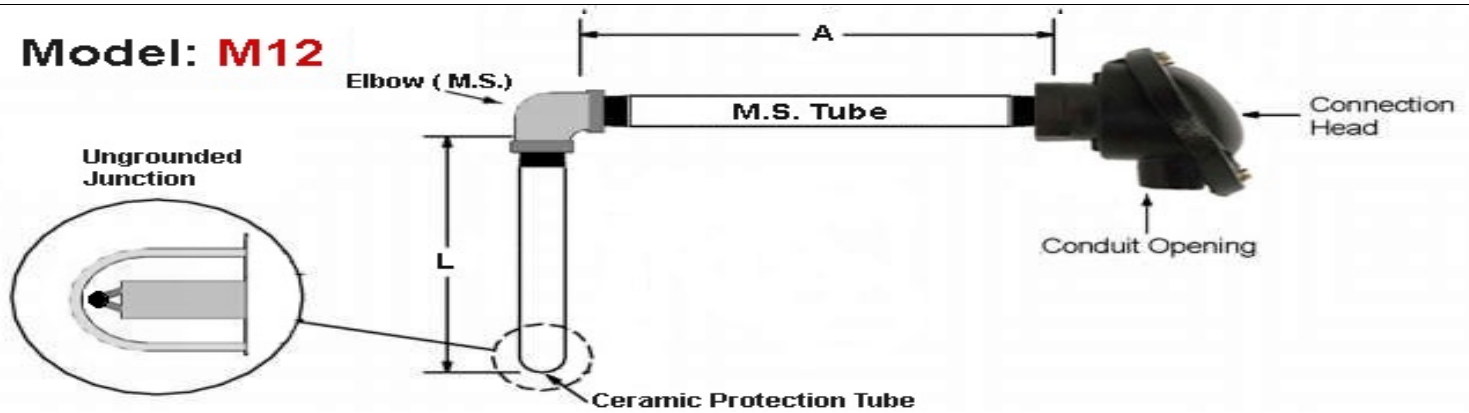

Configuration

1	Calibration	
Standard Limits of Error	ACCURACY	
A	J	0.75 %
B	K	500°C + - 3°C / Above 0.75%

2	"L" Dimension
Specify "L" Length In mm	

3	Connection Head Options
1	4-20mA Transmitter

4	Conduit Opening
1	1/2" NPT
2	3/4" NPT

5	Junction			
Wire Dia.	Grounded		Ungrounded	
	Simplex	Duplex	Simplex	Duplex
1.6 mm	A	E	I	M
2 mm	B	F	J	N
2.5 mm	C	G	K	O
3.2 mm	D	H	L	P

6	Metal Protection Tube For "A" Dimension
1	25 mm O.D
2	22 mm O.D
3	16 mm O.D
4	12 mm O.D
5	06 mm O.D

7	Protection Tube For "L" Dimension
1	25 mm O.D
2	22 mm O.D
3	16 mm O.D
4	12 mm O.D
5	06 mm O.D

8	"A" Dimension
Specify "A" Length In mm	

9	Connection Head Model
A	Cast Aluminum Standard
B	Cast Aluminum Mini
C	Flame Proof

Ajmer Thermotech Pvt. Ltd. Mobile: +91-9414008884 & Fax: +91-145- 2626398