


NOBEL METAL THERMOCOUPLES

Noble Metal Thermocouple (Without Connection Head)

Model: **P6**

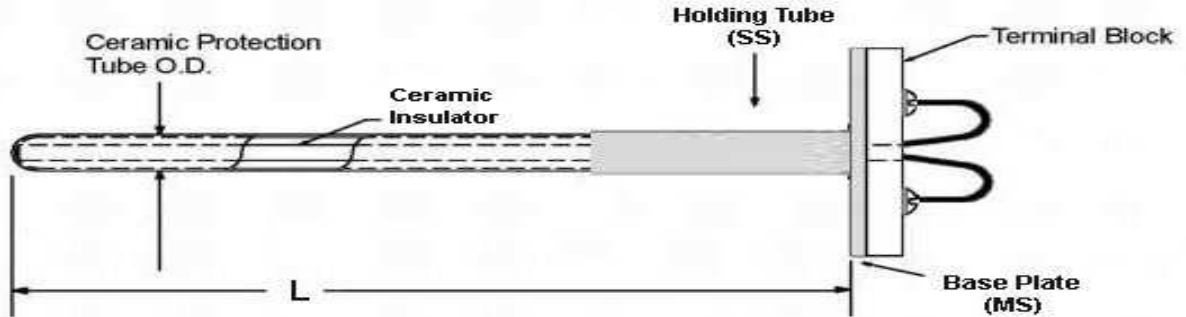

Configuration

| 1 | Ceramic Tube Size |
|---|-------------------|
| A | 24 mm(O.D.) |
| B | 20 mm (O.D.) |
| C | 15 mm (O.D.) |
| D | 12 mm (O.D.) |
| E | 08 mm (O.D.) |

| 2 | Calibration | |
|---|--------------------------|----------|
| | Standard Limits of Error | ACCURACY |
| A | R (PTRH13%PT) | 0.5% |
| B | S (PTRH 10%PT) | 0.5% |
| C | B (PTRH 30% PTRH 6%) | 0.5% |

| 3 | "L" Dimension |
|---|--------------------------|
| | Specify "L" Length In mm |

| 4 | Protection Tube |
|---|-------------------------------|
| 1 | High Alumina (710)1800°C Max. |
| 2 | Alumina (610) 1600°C Max. |

| 5 | Wire Dia.(mm) | |
|-----|---------------|--------|
| | Simplex | Duplex |
| Dia | | |
| A | .45 mm | |
| B | .40 mm | |
| C | .33 mm | |
| D | .3 mm | |
| E | .25 mm | |

| 6 | Terminal Block Description |
|---|----------------------------|
| A | Ceramic |
| B | Ceramic , Spring Loaded |

Ajmer Thermotech Pvt. Ltd. Mobile: +91-9414008884 & Fax: +91-145- 2626398