


Mineral Insulated Thermocouple

Thermocouple With Thermowell Assembly (Stepped Threaded)

Model: **R9**

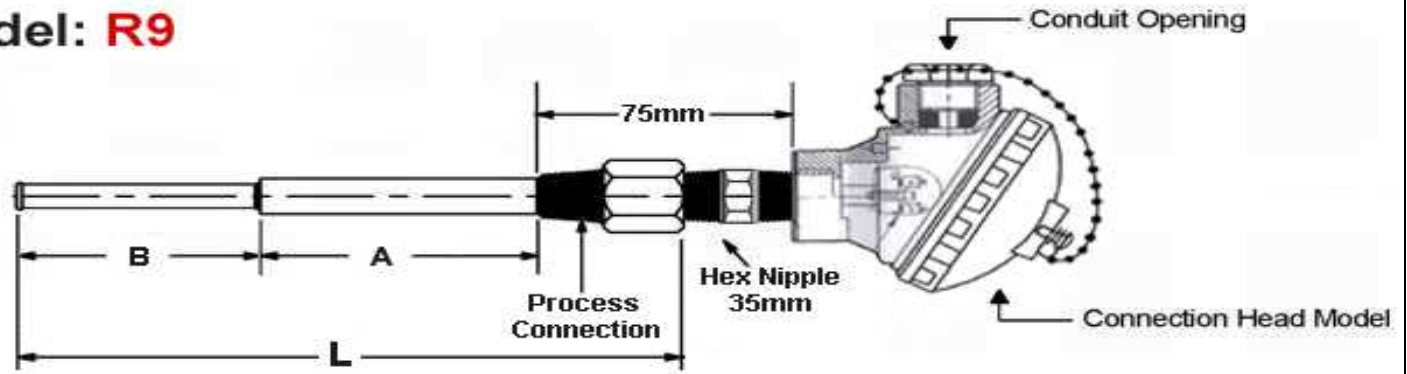

Configuration

1	Sheath Material
1	SS 304
2	SS 310
3	SS 316
5	Inconel 600

2	Calibration	
	Standard Limits of Error	ACCURACY
A	J	0.75%
B	K	500°C + - 3°C / Above 0.75%

3	"L" Dimension
	Specify "L" Length In mm

4	Junction Styles		
Element Description	Grounded	Ungrounded	
	Common	Common	Isolated
Simplex	G	U	
Duplex	D	F	H

5	Process Connection
1	½ " NPT
2	¾ " NPT
3	1 " NPT

6	Connection Head Model
1	Cast Aluminum: Standard
2	Cast Aluminum: Mini
3	Flame Proof

7	"B" Dimension
	Specify "B" Length In mm
	Specify "B" Length O.D. In mm and I.D. In mm

8	Conduit Opening
1	½ " NPT
2	¾ " NPT

9	"A" Dimension
	Specify "A" Length In mm
	Specify "A" Length O.D. In mm and I.D. In mm

10	Connection Head Options
1	None
2	4-20 mA Transmitter