


Platinum / Rhodium Thermocouple

Platinum / Rhodium Thermocouple with Metal Protection Tube Assembly

Model: P5

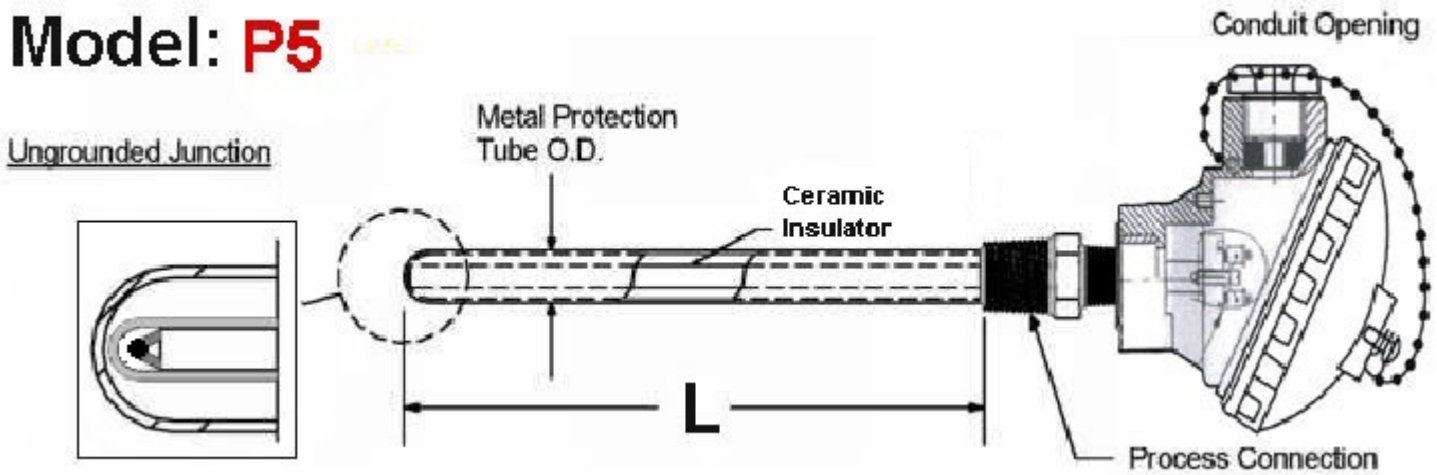

1	Calibration	
	Standard Limits of Error	ACCURACY
A	R (PTRH13% PT)	0.5%
B	S (PTRH 10% PT)	0.5%
C	B (PTRH 30% PTRH6%)	0.5%

4	Connection Head Model
A	Cast Aluminum Standard
B	Cast Aluminum Mini
C	Flame Proof

7	Metal Protection Tube
A	25 mm O.D
B	22 mm O.D
C	16 mm O.D
D	12 mm O.D
E	06 mm O.D

Configuration

2	"L" Dimension
	Specify "L" Length Inmm

5	Conduit Opening
A	1/2" NPT
B	3/4" NPT

8	Wire Dia.(mm)	
Dia	Simplex	Duplex
A	.45 mm	
B	.40 mm	
C	.33 mm	
D	.30 mm	
E	.25 mm	

3	Sheath Material
A	310SS
B	Inconel 600

6	Process Connection
A	None
B	1/2" NPT
C	3/4" NPT
D	1" NPT

9	Connection Head Options
A	420mA Transmitter