


Platinum / Rhodium Thermocouple

Platinum / Rhodium Thermocouple with Single Ceramic Protection Tube Assembly

Model: P4

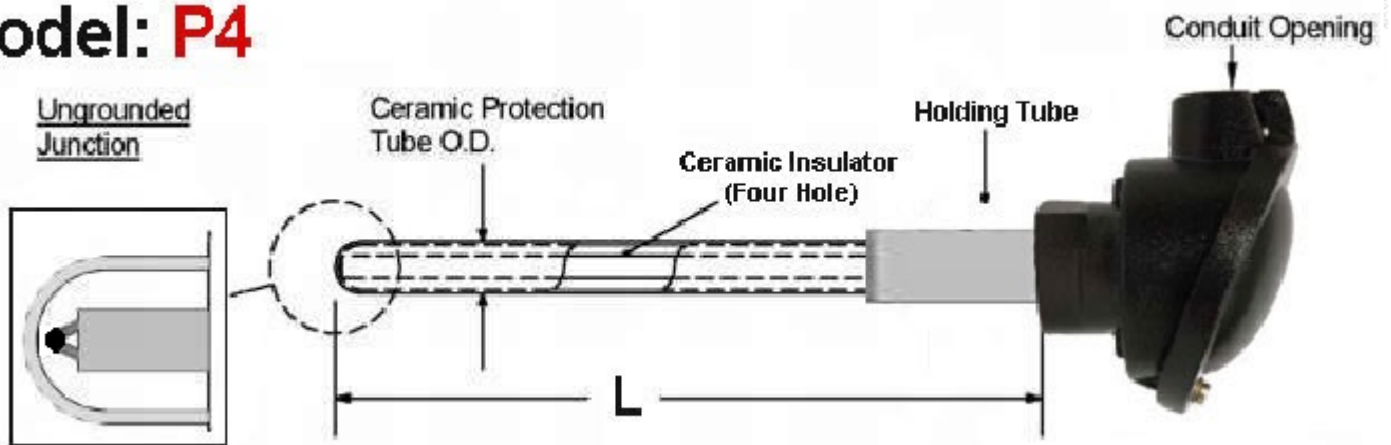

Configuration

1	Ceramic Tube Size
A	24mm(O.D.)
B	20mm (O.D.)
C	15mm (O.D.)
D	12 mm (O.D.)
E	08 mm (O.D.)

2	Calibration	
	Standard Limits of Error	ACCURACY
A	R (PTRH13%PT)	0.5%
B	(PTRH 10%PT)	0.5%
C	B PTRH 30% PTRH 6%)	0.5%

3	"L" Dimension
	Specify "L"Length Inmm

4	Protection Tube
A	High Alumina (710)1800°C Max.
B	Mullite (610) 1600°C Max.

5	Wire Dia.(mm)	
	Simplex	Duplex
A	.45 mm	
B	.40 mm	
C	.33 mm	
D	.30 mm	
E	.25 mm	

7	Connection Head Model
A	Cast Aluminum Standrd
B	Cast Aluminum Mini
C	Flame Proof

9	Process Connection
A	Flange(Fixed & Adjustable)
B	Bush(Fixed & Adjustable)

6	Conduit Opening
A	1/2" NPT
B	3/4" NPT

8	Connection Head Options
A	420mA Transmitter