


Portable Handheld Thermocouple

Master Type-K Thermocouple

Model: **R15**

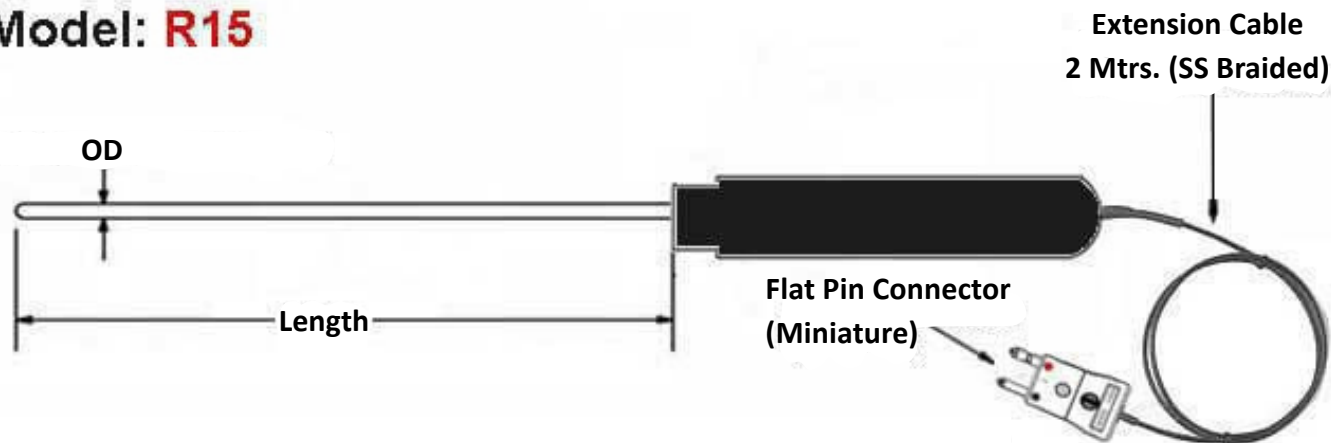

Configuration

Sheath Metal	
1.	SS304
2.	SS310
3.	SS316
4.	Inconel 600

Outer Dia.	
1.	1 mm
2.	1.5 mm
3.	3 mm
4.	6 mm

Junction Style	
Simplex: Ungrounded	

Accuracy	
Type K: 500°C (+/- 3°C / Above 0.75%)	

Termination	
1.	50 mm Split Leads, 15 mm Bare ends
2.	50 mm Split Leads, Spade Lugs
3.	Standard Male Plug (425 F)
4.	Standard Female Plug (425 F)
5.	Mini Male Plug (425 F)
6.	Mini Female Plug (425 F)
7.	High Temp. Male Plug (800 F)
8.	High Temp. Female Plug (800 F)

“L” Dimension	
Specify “L” Length in MM	

Termination	
1.	24 Gauge, Stranded Kapton
2.	24 Gauge, Solid Kapton
3.	24 Gauge, Stranded Teflon
4.	24 Gauge, Solid Teflon
5.	24 Gauge, Stranded Fiberglass
6.	24 Gauge, Solid Fiberglass